## 18' X 40'2" LAZY-ELL LEFT 6"RADIUS

DIMENSIONS


28'6" ᄚ

4 <u>ත</u>

PERIMETER 110'2"

22238 675

Ħ

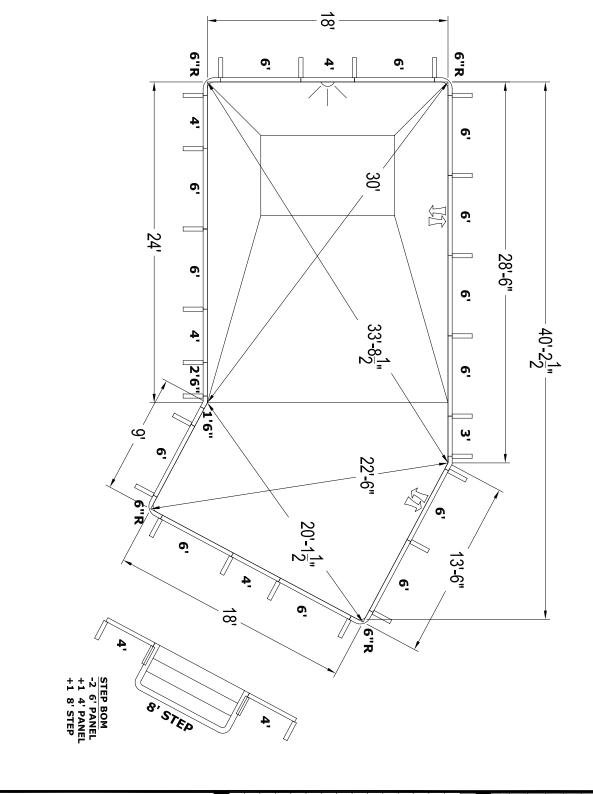

25

**COPING LAYOUT** 

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels

NO DIVING WARNING

ATTENTION DEALER/BUILDER

## ADDITIONAL NOTES

- 1. Kough excavation should be 2" to 3" deeper in each instance.
  2. Soil to have minimum bearing capacity of 2000 P.S.F.
  3. Locate top of pool at least 6" above surrounding land elevation.
  4. See "Panel Shelf Detail" for excavation around pool.
  5. Fill voids under base of panels and tamp well.
  6. Backfill with non-expansive material. **EXCAVATION NOTES** Rough excavation should be 2" to 3" deeper in each instance.
- Dimensions are from inside pool panels.
   The water level should be no more than 6" below the coping receptor (hangtab) slot.

**GENERAL NOTES** 


hese are finished dimensions ready for the liner.


Backfill with non-expansive material.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.

|  |  | -      | HP199 BRACE | HP120 REV 30° LAZY-ELL PANEL              | HP121 30° LAZY-ELL PANEL | HP156 6"R PANEL | HP182S 1'6" SPECIAL PANEL | HP183S 2'6" SPECIAL PANEL | HP103 3' PANEL | HP104L 4' PANEL (LIGHT) | HP104 4' PANEL | HP106A 6' PANEL (A/G) | HP106 6' PANEL  | PART DESCRIPTION | LL OF MATERIALS    | 4' U - | 4' P 9' -H-  | 4' N 24' | 10' S 13'6" | 8' T 18' | 4'8" M2 - | 3'4" M 16'2½" |
|--|--|--------|-------------|---|--------------------------|-----------------|---------------------------|---------------------------|----------------|-------------------------|----------------|-----------------------|---|------------------|--------------------|--------|--|----------|-------------|----------|-----------|---------------|
| WHERE HEEDED AND BEAM PERIMETER OF BOND BEAM | \\ \rightarrow\ \rightarrow\ \\ \rightarrow\ \righta | I—II У |             | UNDISTURBED 2' VERNICULITE OR SAND BOTTOM |                          | BACKFILL        | USE NON-EXPANSIVE         | O VINYL LINER             | BRACE          |                         |                |                       | CONCRETE DECK APPROX 4" DEEP  — 2" OVERDIG—  ALUMINUM  COPTNE |                  | PANEL SHELF DETAIL |        | $G \longrightarrow I \longrightarrow $ |          |             | 5-       | A         |               |

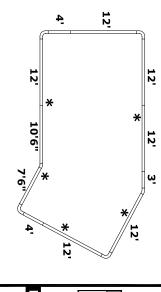

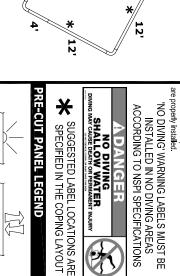



HGHT

AQUAGENIE



18' X 40'2" LAZY-ELL LEFT 6"RADIUS

**JAN 2006** 

HYDRA

10420

Copyright © 2006 by Hydra Pools

Document ID: HF6100, Hydra Standard Panel Layout Drawing Rev Date: 1216/2005 Rev Level: A