
14' X 28' RECTANGLE 2' RADIUS



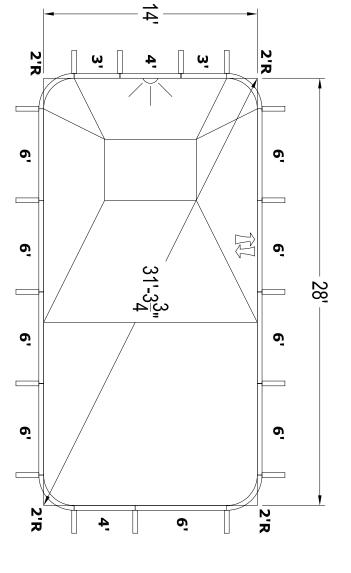

-1 6' PANEL STEP BOM +1 BRACE +2 1' PANEL -1 4' PANEL

+1 8' STEP

4

STEP BOM
-2 6' PANEL
+1 4' PANEL
+1 8' STEP

10' 12 12

12 PERIMETER 80'7"

├─ 2' OVERDIG →

PANEL

VINYL LINER

2' VERMICULITE OR SAND BOTTOM

4 ගු ගු 28 3'4<u>"</u> DIMENSIONS

4 28


NSPI TYPE


0

CAPACITY ARE/

10963 392

 ∞

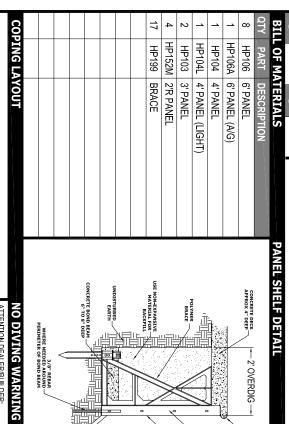



It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed ATTENTION DEALER/BUILDER 'NO DIVING' WARNING LABELS MUST BE

ACCORDING TO NSPI SPECIFICATIONS **INSTALLED IN NO DIVING AREAS**

NO DIVING
SHALLOW WATER
VING MAY CAUSE DEATH OR PERMANENT INJURY <u>ADANGER</u>

SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT

PRE-CUT PANEL LEGEND



HGHT

AQUAGENIE 191



10112

Locument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

Dimensions are from inside pool panels.
 The water level should be no more than 6" below the coping receptor (hangtab) slot.

2. Soil to have minimum bearing capacity of 2000 P.S.F.

3. Locate top of pool at least 6" above surrounding land elevation.

4. See "Panel Sheff Detail" for excavation around pool.

5. Fill voids under base of panels and tamp well.

6. Backfill with non-expansive material.

agent of the Manufacturer. The construction methods Illustrated here are suggestions and apply

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an

Proper installation is the responsibility of the dealer/builder/contractor.

JAN 2006

HYDRA

14' X 28' RECTANGLE 2' RADIUS

EXCAVATION NOTES

Rough excavation should be 2" to 3" deeper in each instance.

GENERAL NOTES

hese are finished dimensions ready for the liner.

Copyright © 2006 by Hydra Pools