16' X 32' RECTANGLE 6" RADIUS - BOWTIE

DIMENSIONS

28 34

ගු ගු

얺 ගු

m-∔□

32 <u>6</u>

7'6"

PERIMETER **NSPI TYPE**

95'2"

CAPACITY


14714 512

ARE/

œ

0

ΩĪ

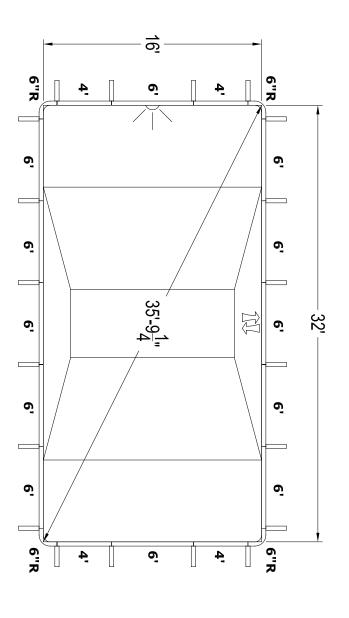

ω

BILL OF MATERIALS

PANEL SHELF DETAIL

APPROX 4" DEEP

├─ 2' OVERDIG →

PANEL

VINYL LINER

2' VERMICULITE OR SAND BOTTOM


76

-H-G-

-M2--

1

HP106 | 6' PANEL

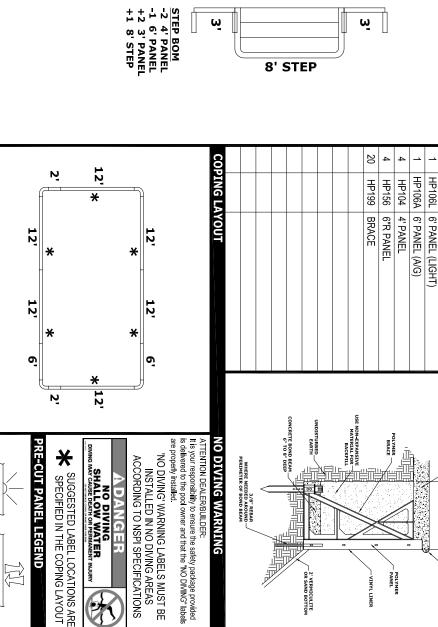

ω

GENERAL NOTES

- hese are finished dimensions ready for the liner.
- Dimensions are from inside pool panels.
 The water level should be no more than 6" below the coping receptor (hangtab) slot.

ADDITIONAL NOTES

EXCAVATION NOTES

2. Soil to have minimum bearing capacity of 2000 P.S.F.

3. Locate top of pool at least 6" above surrounding land elevation.

4. See Panel Shelf Detail for excavation around pool.

5. Fill voids under base of panels and tamp well.

6. Backfill with non-expansive material. Rough excavation should be 2" to 3" deeper in each instance. THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.

Sweetwater, TN 37874

HGHT

AQUAGENIE 191

16' X 32' RECTANGLE 6" RADIUS - BOWTIE

JAN 2006

HYDRA

10122