20' X 40' RECTANGLE 6" RADIUS - WEDGE

DIMENSIONS

28 3'4<u>"</u> 40' 20

 $\frac{3}{2}$

PERIMETER **NSPI TYPE**


119'2"


CAPACITY ARE/

25793 800

0


4 겅 ගු

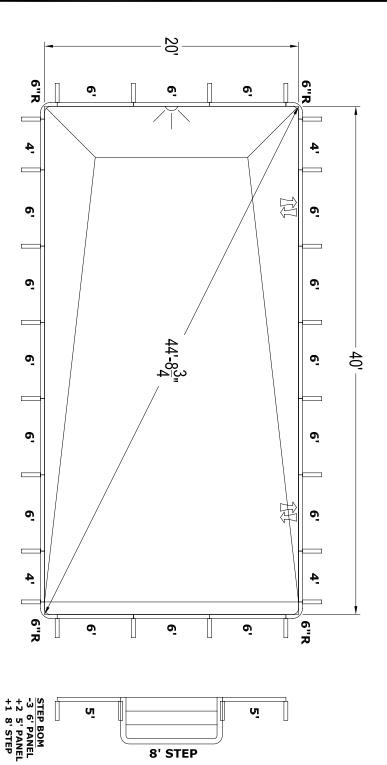

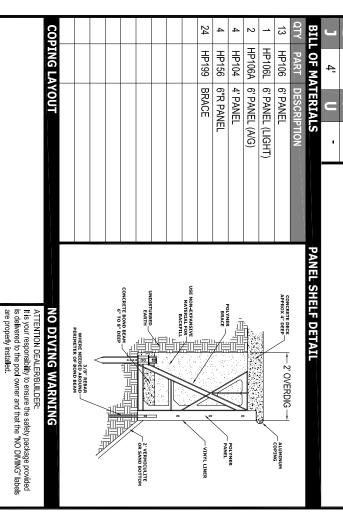

ហ្ម

8' STEP

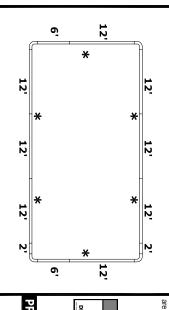


ACCORDING TO NSPI SPECIFICATIONS

INSTALLED IN NO DIVING AREAS

NO DIVING
SHALLOW WATER
MAY CAUSE DEATH OR PERMANENT INJURY

ADANGER

ω

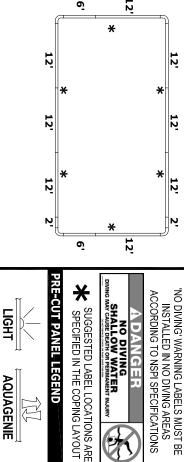



HGHT

AQUAGENIE 131

10161

20' X 40' RECTANGLE 6" RADIUS - WEDGE

Copyright © 2006 by Hydra Pools.

Locument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

Dimensions are from inside pool panels.
 The water level should be no more than 6" below the coping receptor (hangtab) slot.

GENERAL NOTES

hese are finished dimensions ready for the liner.

ADDITIONAL NOTES

EXCAVATION NOTES

 Soil to have minimum bearing capacity of 2000 P.S.F.
 Locate top of pool at least 6" above surrounding land elevation.
 See Panel Sheff Detail" for excavation around pool.
 Fill voids under base of panels and tamp well.
 Backfill with non-expansive material. Rough excavation should be 2" to 3" deeper in each instance. only to normal ground conditions. There may be additional precautions and/or methods of agent of the Manufacturer. The construction methods llustrated here are suggestions and apply The dealer or contractor who sells or installs your pool is an independant contractor and is not an THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

Proper installation is the responsibility of the dealer/builder/contractor.

JAN 2006

HYDRA