20' X 40' RECTANGLE 2' RADIUS - WEDGE

DIMENSIONS

28 3'4<u>"</u> 40' 20

> <u>4</u> νī

> > PERIMETER NSPI TYPE


116'7"


CAPACITY ARE/

25490 800

0

4 겅 ගු

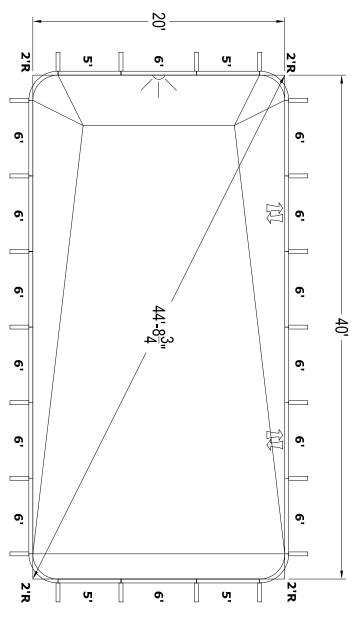

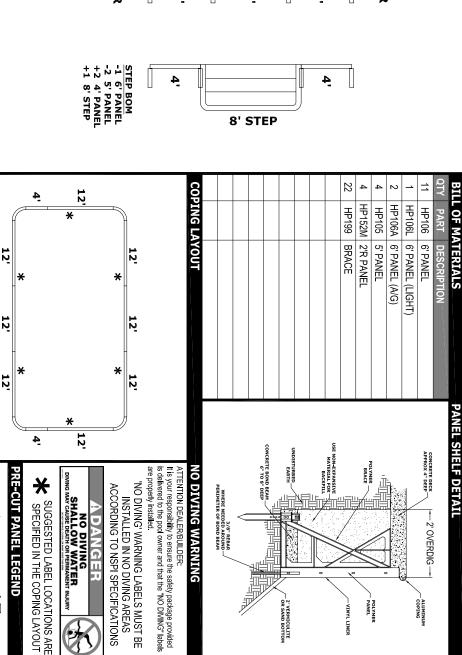

PANEL

VINYL LINER

2' VERMICULITE OR SAND BOTTOM

GENERAL NOTES

- hese are finished dimensions ready for the liner.
- Dimensions are from inside pool panels.
 The water level should be no more than 6" below the coping receptor (hangtab) slot.

Document ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

Soil to have minimum bearing capacity of 2000 P.S.F.
 Locate top of pool at least 6" above surrounding land elevation.
 See Panel Sheff Detail" for excavation around pool.
 Fill voids under base of panels and tamp well.
 Backfill with non-expansive material.

EXCAVATION NOTES ADDITIONAL NOTES

Rough excavation should be 2" to 3" deeper in each instance. THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

only to normal ground conditions. There may be additional precautions and/or methods of agent of the Manufacturer. The construction methods llustrated here are suggestions and apply The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.



HGHT

AQUAGENIE 131

20' X 40' RECTANGLE 2' RADIUS - WEDGE

JAN 2006

HYDRA

10164

Copyright © 2006 by Hydra Pools.